


Dimensions	W82/22	W98/32K	W98/32L	W114K	W114L	W130
Cm (Inch)						
A	31 (12.2")	42 (16.6")	56 (22.1")	42 (16.6")	56 (22.1")	64 (25.2")
B (U3)	60 (23.7")	78 (30.8")	87 (34.3")	82 (32.3")	82 (32.3")	105 (41.4")
B (U5)	62 (24.5")	81 (31.9")	90 (35.5")	85 (33.5")	95 (37.5")	108 (42.6")
C	46 (18.2")	61 (24.1")	102 (40.2")	61 (24.1")	102 (40.2")	125 (49.3")
D	52 (20.5")	73 (28.8")	83 (32.7")	73 (28.8")	83 (32.7")	94 (37.0")
E	17 (7.0")	14 (5.6")	52 (20.5")	13 (5.2")	51 (20.1")	69 (27.2")
F	26 (10.3")	32 (12.6")	44 (17.4")	32 (12.6")	44 (17.4")	52 (20.5")
G	33 (13.0")	45 (17.8")	53 (20.9")	45 (17.8")	53 (20.9")	62 (24.5")
Packaging WxDxH	69x34x50 (28x14x20")	99x71x124 (40x28x49")	112x80x139 (44x32x55")	99x71x124 (40x28x49")	112x80x139 (44x32x55")	122x78x142 (48x31x56")
Volume	0,12 m ³	0,87 m ³	1,25 m ³	0,87 m ³	1,25 m ³	1,35 m ³

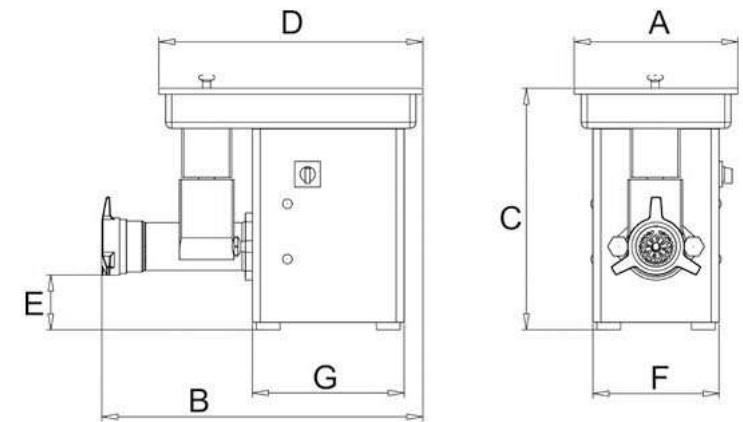

Technical specifications

Model

	W82/22	W98/32K	W98/32L	W114K	W114L	W130
	Table	Table	Free Standing	Table	Free Standing	Free Standing
Diameter of mincerplate	W82: Unger H 82 mm W22: 83 mm	W98: Unger B 98 mm W32: 100 mm		Unger D 114 mm		Unger E 130 mm
Tray capacity	10 liters	23 liters	52 liters	23 liters	52 liters	78 liters
Hourly output	± 300-350 kg/h	± 700-800 kg/h		± 900-1200 kg/h		± 1300-1700 kg/h
	± 660-780 lbs/h	± 1550-1770 lbs/h		± 2000-2650 lbs/h		± 2900-3800 lbs/h
Power three-phase motor	1,5 HP / 1,1 kW	3 HP / 2,2 kW		5 HP / 3,7 kW		7,5 HP / 5,5 kW
Consumption three-phase motor	400/380V	2,5 A	5,0 A	8,3 A		13,2 A
	230/220 V	4,3 A	8,7 A	14,3 A		22,8 A
Power single-phase motor	1,75 HP / 1,3 kW	3 HP / 2,2 kW		■	■	■
Consumption single-phase motor	230/220 V	15,5 A	16 A	■	■	■
Net weight three-phase machine	± 50 kg	± 110 kg	± 140 kg	± 122 kg	± 152 kg	± 230 kg
	± 110 lbs	± 245 lbs	± 310 lbs	± 270 lbs	± 335 lbs	± 510 lbs
Noise level at 1 m	60 dB(A)	62 dB(A)	62 dB(A)	64 dB(A)	64 dB(A)	64 dB(A)
Operating temperature	5° to +40° C (40° to 100° F)					
Operating relative humidity	20 to 90%					